


Hand Operated Curtain Pole System

Silent Gliss® 6140M Metropole 50mm

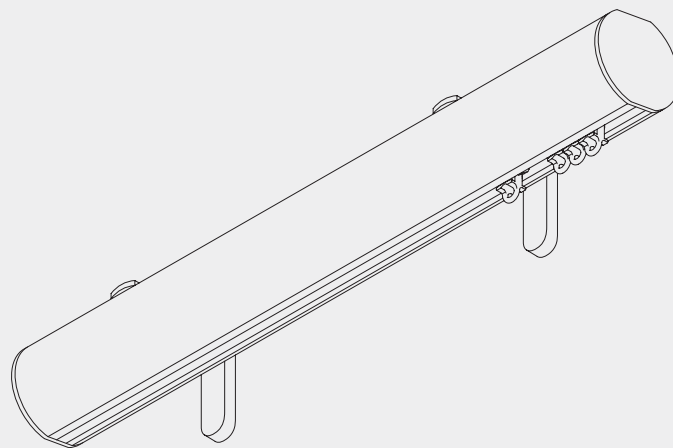


Product Information

- Hand operated system for domestic and contract applications
- Can be bent for bay windows
- Choice of 7 different finishes - black, white, steel grey, antique bronze, taupe, silver and oak effect
- Accessorised with matching end caps and co-ordinated or matching brackets/bracket covers
- A selection of finials are available
- Easy wall or ceiling fix
- For medium to heavy curtains
- Suitable for use with Wave Standard and Wave XL curtain heading system
- Profile length 6m (oak effect 5m)



6140M

Profile and Bending Information

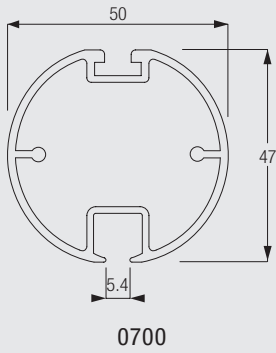


 Standard radius 500mm
(Inc. Wave XL)

Note: It is important to observe the minimum bending radius for Wave XL. The system will not function with a smaller radius.

Specification Guide - download www.silentgliss.co.uk (password required)

Silent Gliss 6140M curtain track, hand drawn, aluminium, assembled complete with gliders 6143 at 10/m and 2 endcovers 0350. Face fix with bracket 0537/ 3134/2-36/2/ 0334/ ceiling fix with bracket 6138P2/ 0335 each screwed to timber /plugged and screwed to block-work/concrete at 600mm centres. Finished in black, white, steel grey, antique bronze, silver, taupe and oak effect.

How To Measure


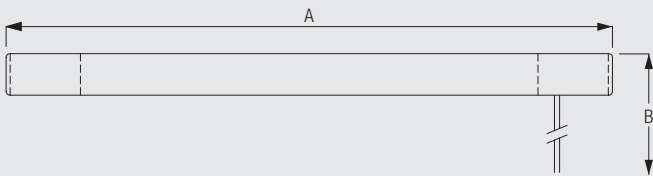


A: System Width - includes finials. See 'Design Options' for finial sizes.

Stack Size Calculation Wave Standard



6140M



a = Stack depth
b = Stack size
c = Min. distance

Glider-cord spacing	Curtain hook spacing	Approx. curtain fullness	Stack depth (a)	Stack width (b)	Min distance (c)
6	10	2.1	10	23 per metre of track + endpiece	8
6	12	2.3	12	23 per metre of track + endpiece	9
8	14	2.1	14	18 per metre of track + endpiece	10
8	16	2.3	16	18 per metre of track + endpiece	11


Wave standard with roller gliders

Glider-cord spacing	Curtain hook spacing	Approx. curtain fullness	Stack depth (a)	Stack width (b)	Min distance (c)
8	14	2.1	14	21 per metre of track + endpiece	10
8	16	2.3	16	21 per metre of track + endpiece	11

(dimensions in cm)

Note: Minimum distance (c) includes a standard 3cm clearance (front and back).

Stack Size Calculation Wave XL




a = Stack depth 35cm
b = Stack size
c = Min. distance 22cm

System width		77-107	108-143	144-179	180-215	216-251	252-287	288-323	324-359	360-395
	b	21	26	31	36	41	46	51	56	61
System width		396-431	432-468	469-503	504-539	540-575	576-600			
	b	66	71	76	81	86	91			
System width		154-217	218-289	290-361	362-433	434-505	506-577	578-600		
	b	21	26	31	36	41	46	51		

(dimensions in cm)


Design Options

Endcaps

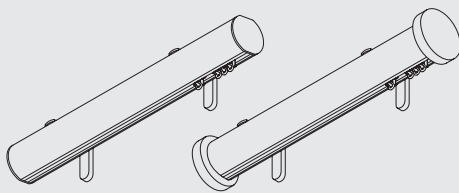

Without finials, poles are supplied as standard with flush fitting endcaps 0350 (left). Alternatively, stud endcaps 0714 (right) can be selected at no additional cost.

Finials

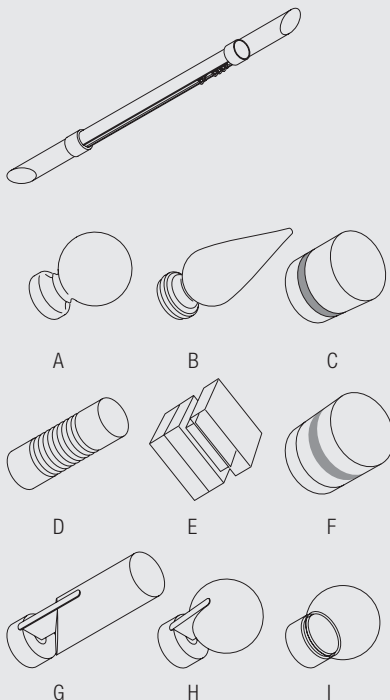


Finials are decorative elements that fit on at the end of the pole.



6140M

- A: 0717 Ball End 125mm
- B: 0718 Real Wood Spear 150mm
- C: 0697 Strata 65mm
- D: 0630 Groove Cylinder 125mm
- E: 0898 Crystal Cube 55mm
- F: 0899 Crystal Cylinder 55mm
- G: Fused Barrel 121mm (walnut/oak/matched)
- H: Fused Ball 81mm (walnut/oak/matched)
- I: Glass Ball (clear/frosted) 70mm

Wave Standard curtain heading system



Wave is an exciting contemporary curtain heading system which allows curtains to hang in a continuous wave which is smooth, simple and elegant.

When using the Wave curtain heading system please note the maximum recommended curtain weight is 2.5kg/m or 10kg/m with wave roller gliders 6098W.

The Wave standard components are:

- 6345 Glider Cord 60mm
- 6346 Glider Cord 80mm
- 6007 End stop

The items listed below for Enhanced Wave (80mm glider cord only) are all supplied at an additional cost as per the price list.


- 2255 Adjustable brake
- 6364 Extension (for use with 6365)
- 6365 Hanger (for use with 6364)
- 6366 Carrier for draw rod

Roller gliders must be ordered separately


- 6098W Wave roller glider 80mm

Optional enhanced components to improve the presentation of the curtain:

- 3582 Hook
- 6349 Curtain tape
- 6363 Iron-on top hemming tape
- 10075 Lead weight for bottom hem 50gr/m
- 10076 Fabric weight for side of curtain

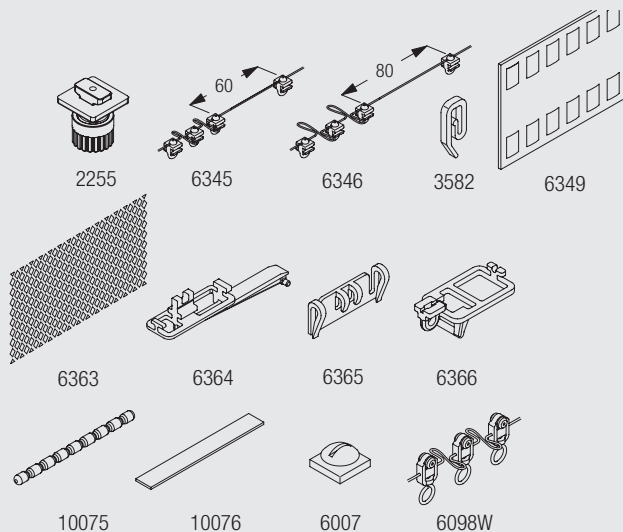


Wave XL curtain heading system



Wave XL is especially designed for high and large application areas through generously designed waves with large cross section dimensions.

6140M

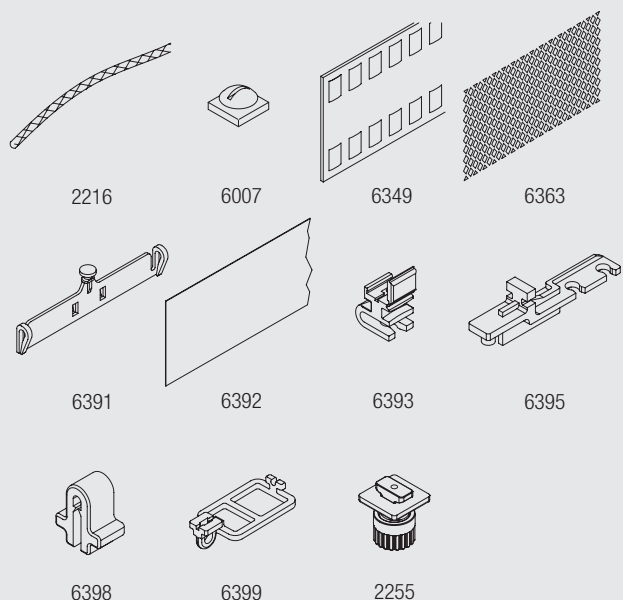


The Wave XL components are:

- 2216 Cord 0.85 mm
- 2255 Adjustable brake
- 6007 End stop
- 6349 Curtain tape
- 6363 Iron tape
- 6391 Hanger
- 6392 Heading film
- 6393 Glider
- 6395 Extension
- 6399 Carrier for draw rod

Additional optional Wave components:

- 6398 Clip


Connecting Profiles




Profiles can be joined with Connecting Bridge 0273.

Fitting Information

Bracket positioning when using Maxi Bracket 0334 (standard)



Fitting of track to bracket

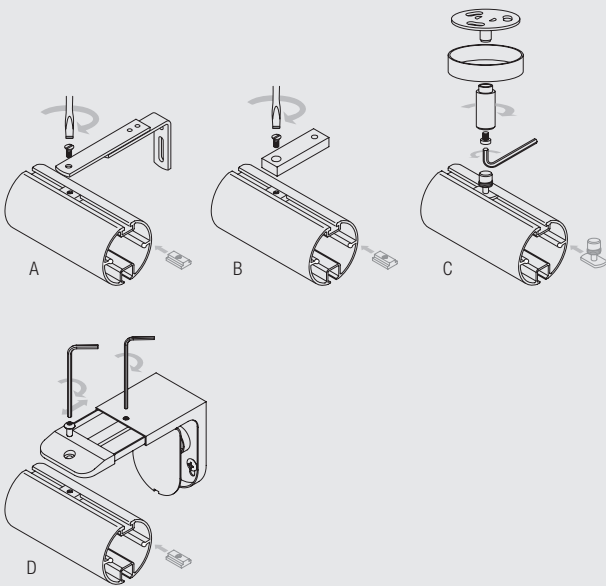

- A: Using adjustable bracket 0537
- B: Using ceiling fix bracket 6138p
- C: Using top fix bracket 0335
- D: Using maxi adjustable bracket 0334


All 50mm Metropole are supplied with Maxi bracket 0334 as standard unless otherwise specified.




6140M

Fitting Options


Wall fix with adjustable brackets 0537

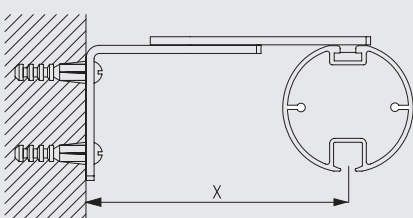

X (mm)
0537 80-100




0537
Adjustable bracket




6141
Track insert (uses screw 0798)

Note: all bent metropole systems are supplied with adjustable bracket 0537 as standard.


Wall fix with brackets 3134/2-3136/2



	X (mm)
3134/2	52
3135/2	72
3136/2	92




3134/b
Midial ceiling fix
bracket




6141
Track insert (uses
screw 0798)

Ceiling fix with 6138P2




	X (mm)
6138P2	80




6138P2 (9mm)
Ceiling support set

Min. distance from wall when using Wave XL: 220mm.


Ceiling fix with top fix bracket 0335



	X (mm)
	50




0335
Top fix bracket




6141
Track insert (uses
screw 0798)

Wall fix with maxi adjustable bracket 0334

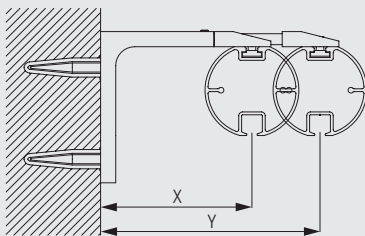

	X (mm)	Y (mm)
0334	80	100



0334
Maxi adjustable
bracket



6141
Track insert (uses
screw 0798)

Standard Accessories






Parts

0334 Maxi adjustable bracket



0350 Flush endcap (50mm)



0700	Profile 50mm		3133	Bracket cover (60mm)	
6065	Twist eye endstop		6141	Track insert (uses screw 0798)	
6143	Glider 6144 in strip form		6784	Machine screw (for 6141 insert)	













Optional Accessories

Parts

6138P2 (9mm)	Ceiling support set		0273	Connecting Bridge for System 6140	
0315	Fused barrel (50mm)		0327	Fused ball (50mm)	
0333	Glass ball (50mm)		0335	Top fix bracket	
0537	Adjustable bracket		0630	Groove Cylinder (50mm)	
0697	Strata (50mm)		0713	Midial connecting bracket	
0714	Stud End cap (50mm)		0717	Ball end finial (50mm pole)	
0718	Spear finial (50mm pole)		0898	Crystal Square (50mm)	
0899	Crystal Cylinder (50mm)		6283	Roller glider	
3134/2	Pole extension bracket (60mm - all colours)		3135/2	Pole extension bracket (80mm - all colours)	
3136/2	Pole extension bracket (100mm - all colours)				

6140M

Wave Accessories

2216	Cord		2255	Adjustable brake	
3582	Hook		6007	Endstop	
6345	Wave glider cord (60mm)		6346	Wave glider cord (80mm)	
6349	Curtain tape		6363	Top hemming tape	
6364	Extension		6365	Hanger	
6366	Wave carrier for draw rod		6391	Hanger	
6392	Heading film		6393	Glider	
6395	Extension		6398	Clip	
6399	Carrier for Draw rod		10075	Lead weight 50 gr/m	
10076	Fabric weight		6098W	Wave roller glider cord (80mm)	



6140M



www.silentgliss.co.uk

www.silentglissglobal.com

Silent Gliss Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: +44 (0) 1843 863571
Fax: +44 (0) 1843 864503
info@silentgliss.co.uk

Silent Gliss Global Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: +44 (0) 1843 874250
Fax: +44 (0) 1843 874457
info@silentglissglobal.com