


Motor		
Operating temperature range	0°C ... + 60°C -20°C ... + 70°C	Unrestricted operation of rated data Storage
Protection class	IP40	Operation in dry rooms
Nominal voltage	100 ... 250 VAC / 50 ... 60 Hz	
Max. Current	0.5 A @ 240V, 1.3 Amp @ 110V	
Max. speed	160 min ⁻¹	
Max. track length	25 m	
Max. torque	2.4 Nm	

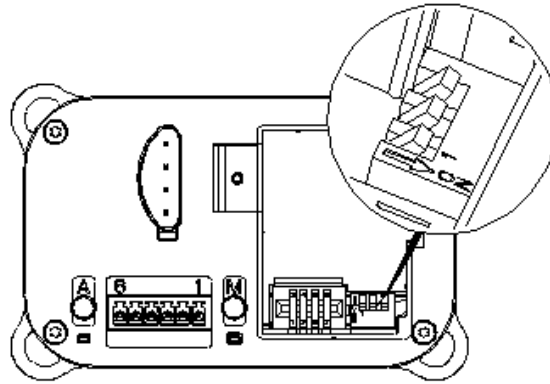

DIP-Switch-Position	Operation mode
1 - X - X	latching
0 - X - X	non latching
X - 1 - X	Touch & Go and Manual Override on
X - 0 - X	Touch & Go and Manual Override off
X - X - 1	Revolution 160min ⁻¹
X - X - 0	Revolution 120min ⁻¹
1 - 1 - 1	Standard (default) setting

Key

1 = On
 0 = Off

*Sample 1 1 1



Revolution 160 / min
 Touch & Go, Manual Override On
 Latching