

B - Dry Contact Control

- 1- Common (Black/White)
- 2- Direction (Orange/White)
- 3-Direction (White)

C- Removable radio aerial

E- limit fine adjustment

Motor ratings

SG 4960 , 0.3a/55rpm – 50/60Hz 3Nm 40w

SG

,SG4760,SG4780,SG2350
SG4970 ,0.8a/32rpm – 50/60Hz 3Nm 40w

SG2350,SG4970 SG4980
0.8/20rpm – 50/60Hz 6Nm 50w

SG4880 1.1a/ 20rpm - 50/60Hz 10Nm 40w


Note

8* Motors can be wired in Parallel only.

Silent Gliss Ltd
Poorhole Lane.
Broadstairs
Kent CT10 2PT
Tel 01843 863571
Fax 01843 864503
E-mail: info@silentgliss.co.uk
Web site: www.silentgliss.co.uk

*See Note for Max quantity wired in parallel.

Also please note permanent mains ring supply should be a separate ring with its own breaker at the fuse board.

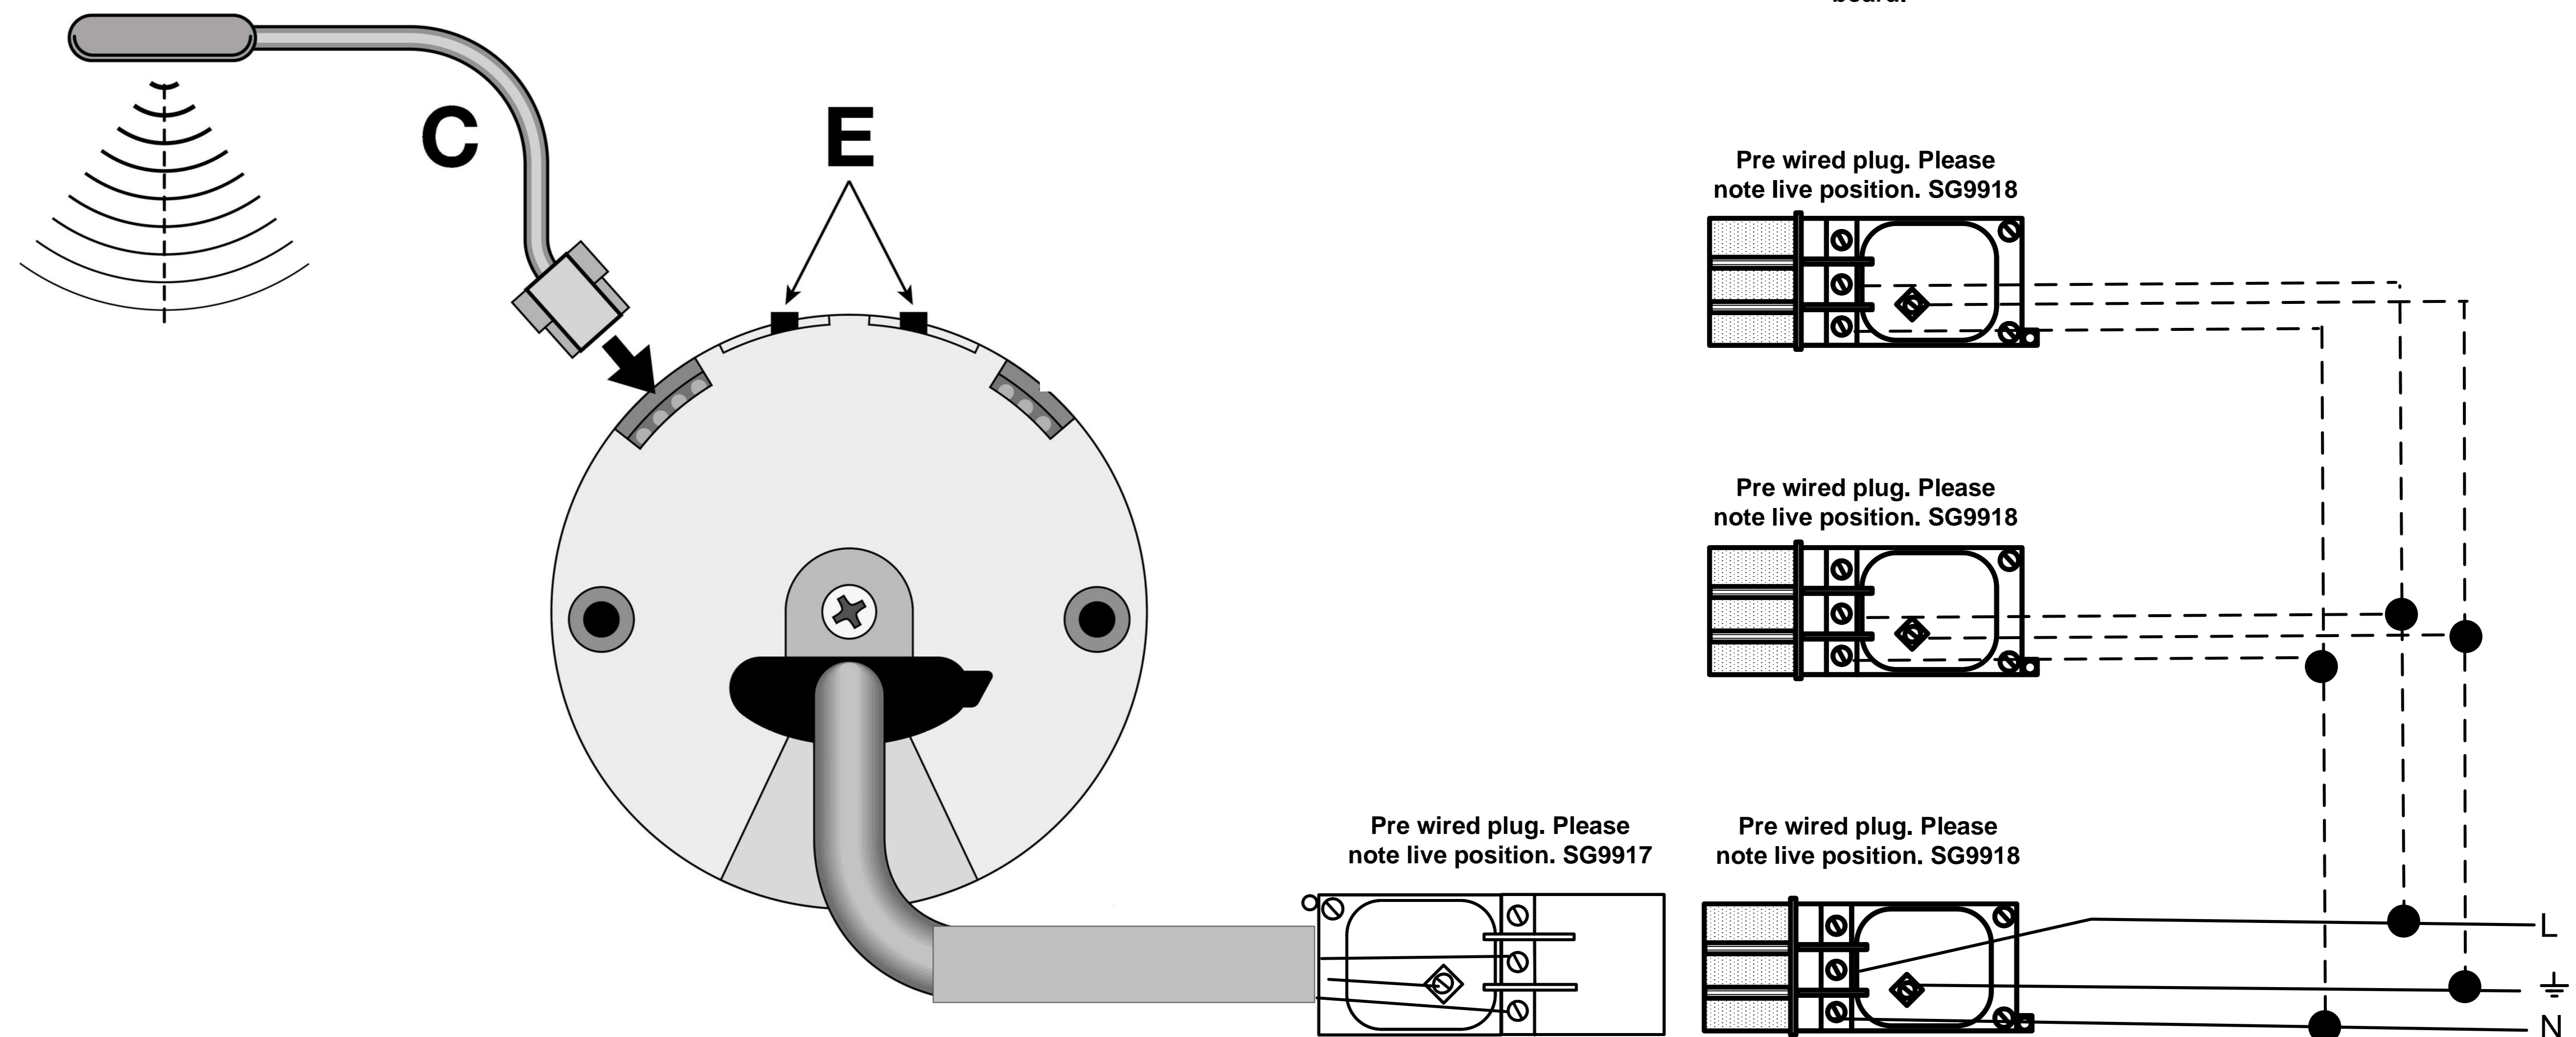

Silent Gliss Radio Control System SG9940

SERIES 40 TUBULAR MOTORS 240V AC

Systems: SG4960,SG4970,SG4880,SG4760,SG4770,SG4780,SG2350

Drawing Number

E 804 /1

Issue Date 12.4.21