



Dry Contact Control

- 1- Common (Black White)
- 2- Direction (Orange/White)
- 3-Direction (White)

C- Removable radio aerial

E- limit fine adjustment

Power Supplies

- SG11263 24v DC 2amps **
- SG11264 24v DC 3.8amps
- SG11265 24v DC 5amps
- SG11266 24v DC 10amps

Motor ratings

- SG4960 1.8amps 24v DC 50/60Hz 55Rpm
- SG4760,SG4770,SG4970,SG23250 1.5 amps 24v DC 50/60Hz 48/32Rpm 36w
- SG2350,SG4970 2.1 amps 24v DC 50/60Hz 20Rpm 50w
- SG4880 2.95 amps 24v DC 50/60 Hz 20Rpm 40w

Note


8* Motors connected via the dry contact cables only.

Silent Gliss Ltd

Poorhole Lane.
Broadstairs
Kent CT10 2PT
Tel 01843 863571
Fax 01843 864503
E-mail: info@silentgliss.co.uk
Web site: www.silentgliss.co.uk

Supplied by
SG-S | Silent Gliss Spares
Silent Gliss Systems
www.sg-s.co.uk email: sales@sg-s.co.uk
Tel: 0330 1272002 - 01395 232528

- 1- Black = common
- 2- Orange = open/close
- 3- White = open/close

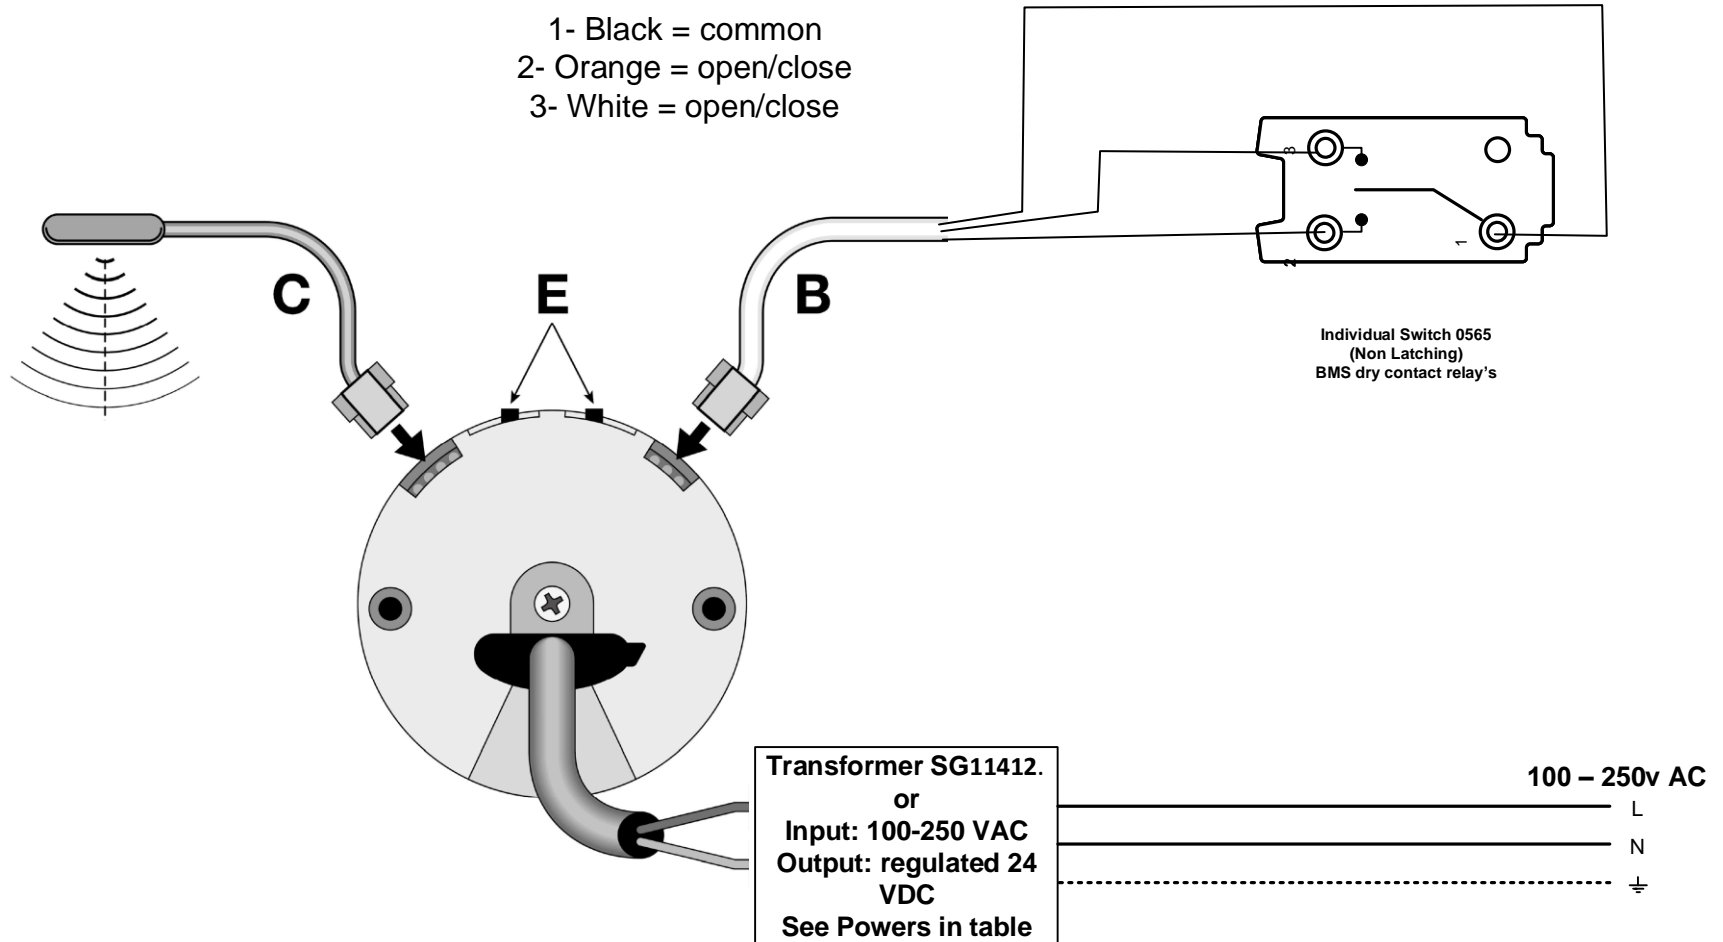

Silent Gliss Radio Control System 9940 & Dry Contact

SERIES 40 TUBULAR MOTORS 24 DC Systems:

SG4960,SG4970,SG4880,SG4760,SG4770,SG4780,SG2350

Drawing Number

E 805/3

Issue Date 05/05/21