



Dry Contact Control


- 1- Common (Black White)
- 2- Direction (Orange/White)
- 3-Direction (White)

C- Removable radio aerial

E- limit fine adjustment

Available from
SG-S | Silent Gliss Spares
 Silent Gliss Systems
 www.sg-s.co.uk email: sales@sg-s.co.uk
 Tel: 0330 1272002 - 01395 232528

Motor dry contact lead included
 1- Black = common
 2- Orange = open/close
 3- White = open/close

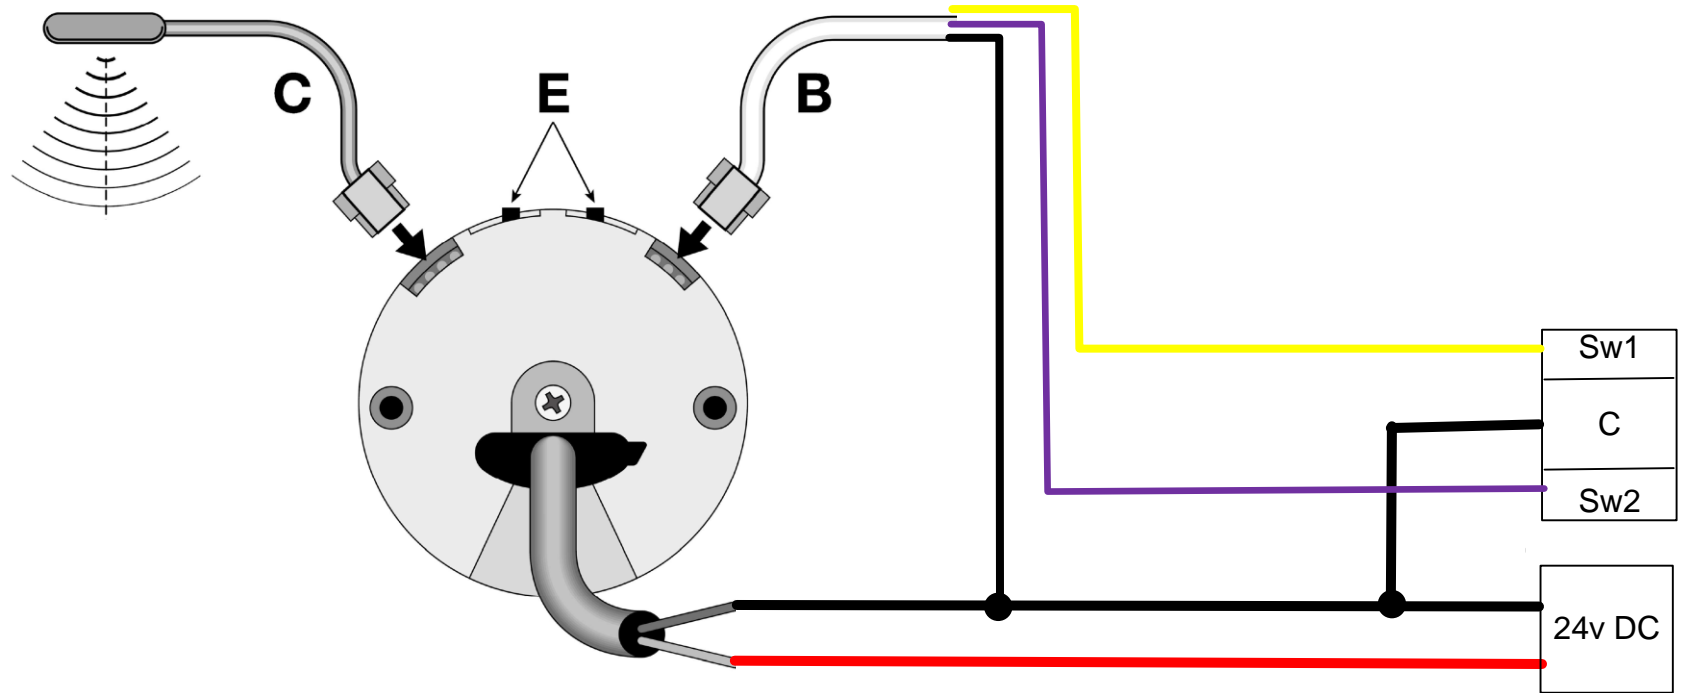

Power Supplies

- SG11263 24v DC 2amps **
- SG11264 24v DC 3.8amps
- SG11265 24v DC 5amps
- SG11266 24v DC 10amps

Motor ratings

- SG11250 1.8amps 24v DC 50/60HZ 55Rpm
- SG11251 1.5 amps 24v DC 50/60Hz 48/32Rpm 36w
- SG11252 2.1 amps 24v DC 50/60Hz 20Rpm 50w
- SG11255 2.95 amps 24v DC 50/60 Hz 20Rpm 40w

Note

8* Motors connected via the dry contact cables only.

Silent Gliss Ltd

Poorhole Lane.
 Broadstairs
 Kent CT10 2PT
 Tel 01843 863571
 Fax 01843 864503
 E-mail: info@silentgliss.co.uk
 Web site: www.silentgliss.co.uk

SERIES 40 MOTORS USING 4 CORE AUTOMATION CABLE

SERIES 40 TUBULAR MOTORS 24V DC Systems:

SG4960,SG4970,SG4880,SG4760,SG4770,SG4780,SG2350

Drawing Number

E 807

Issue Date 3/11/20 FRO